




AOPEN

Bright Ideas Connected

C-Tile

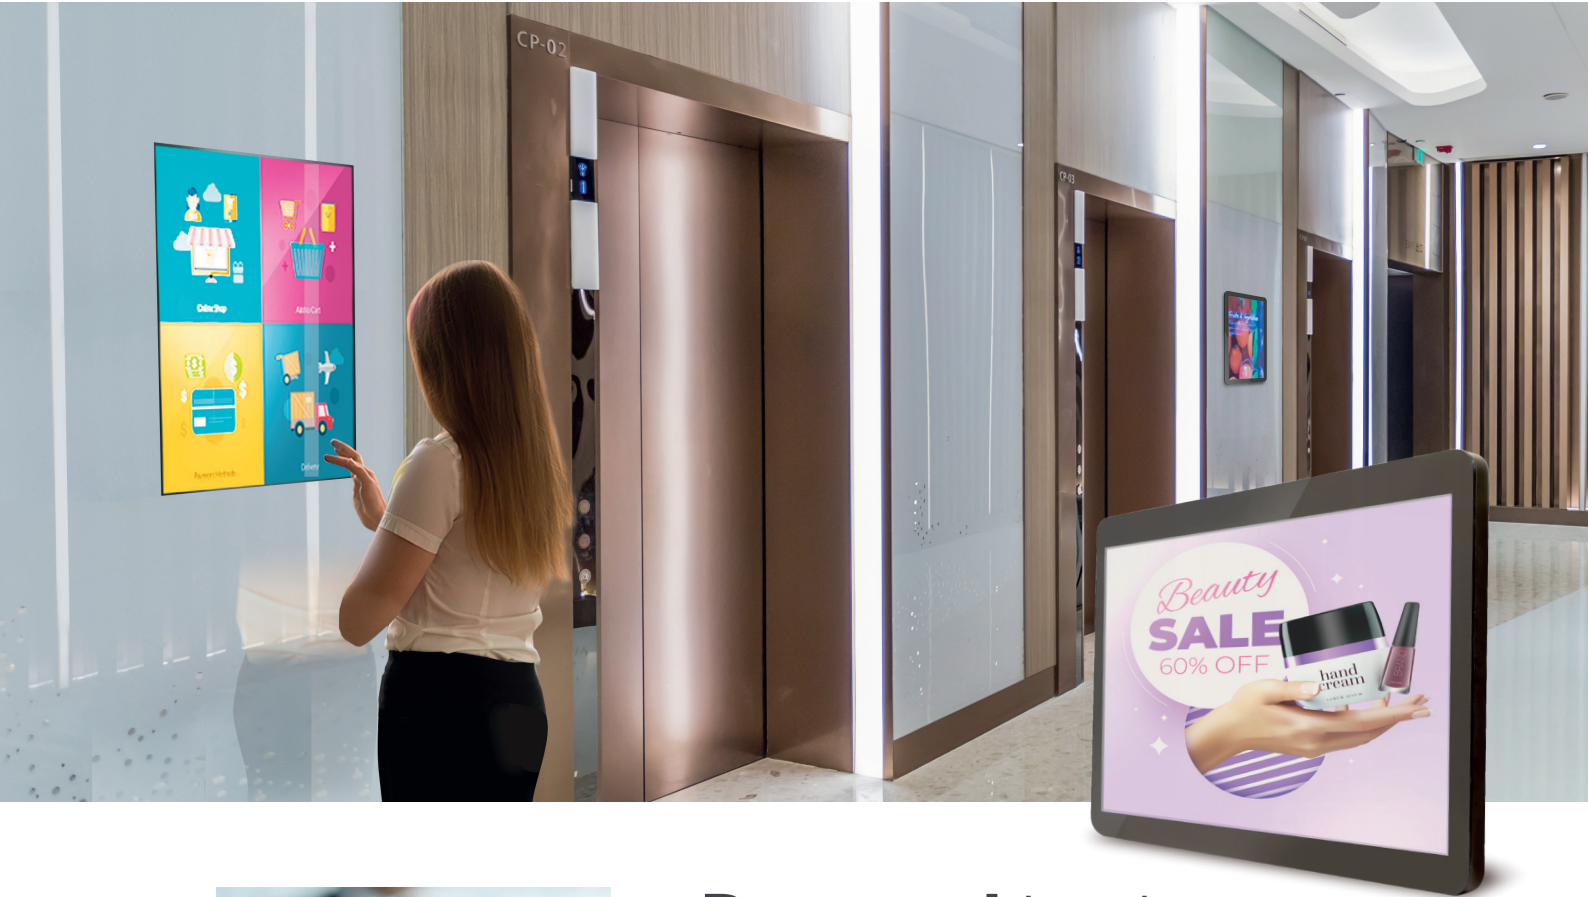


Powered by the Chromebox Mini C-Tile 22

The C-Tile 22 is the successor of the Chromebase Commercial. It's 22" 2-in-1 solution, with no internal moving parts to make it more suitable for commercial environments. The device is driven by a Chromebox Mini. Therefore, the C-Tile 22 runs on a Chrome OS. The Chrome OS ensures a high security for Cloud use and to increase security the C-Tile 22 also has a Google TPM and a Kensington Lock.



The C-Tile 22 features:

- + Fanless suitable for commercial application
- + Modular design easy for future upgrade & maintenance
- + Hidden Power Button to prevent accident turn on/off the device
- + High security with Google TPM and a Kensington Lock

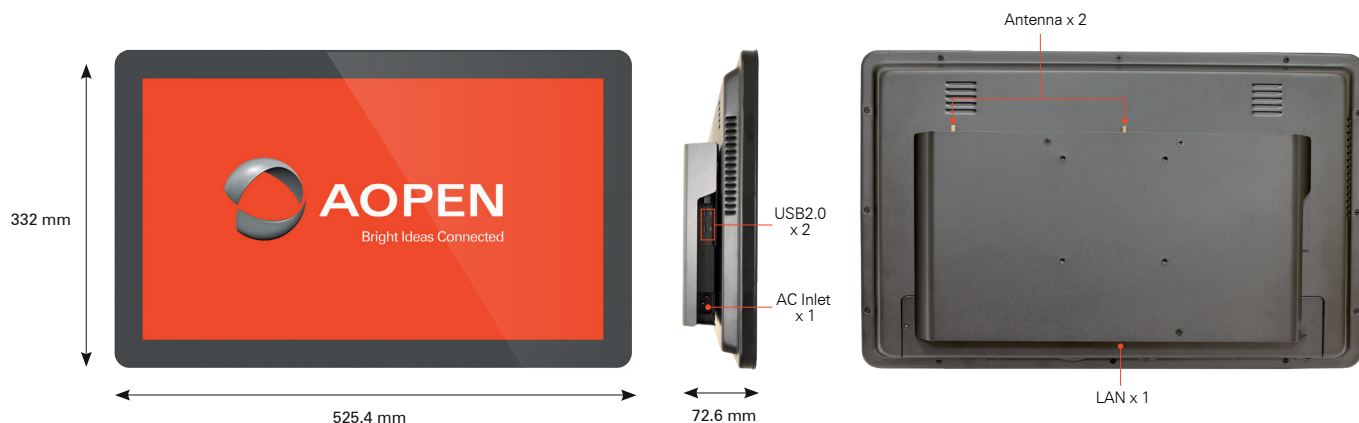

Model name		C-Tile 22		
Housing Material		Metal		
Dimension	W x H x D (mm)	525.4 x 332 x 72.6 mm		
	W x H x D (inch)	20.7 x 13.1 x 2.9 inch		
Weight		N.W: 8.34Kg / G.W: 9.8Kg		
CPU		RK3288C (Cortex-A17 1.8GHz)		
Chipset		-		
Memory	Channel	Dual Channel		
	Type	LP DDR3		
	Data rate	1600 MT/s		
	Capacity	4G		
Graphics		ARM Mali-T764 MP4 GPU @ 600 MHz		
Front Panel	Resolution	21.5" 1920 x 1080 (16:9)		
	Max Brightness	250 nits		
	Panel Type	VA		
	Viewing angle	178°/178°		
	Response time	25ms		
	Contrast Ratio	3000:1		
Touch		E-LED		
Expansion Slot		-		
Audio		-		
LAN		Giga LAN x 1 10/100/1000 Mbps		
Storage		EMMC 5.0 16G		
Security		Google TPM, Kensington lock		
Storage Bay		-		
Side Panel I/O	Power Button	x 1 (Hidden type)		
	Brightness Up	-		
	Brightness Down	-		
	HDD Indicator	-		
System I/O	DC Jack	-		
	HDMI Out Port	-		
	USB 2.0 Port	x 2		
	USB 3.0 Port	-		
	RS232 Series Port	-		
	Audio Set	Line-out	-	
		Mic-in	-	
Other	AC Inlet x 1			
WatchDog Timer		-		
IP Grade		Front IP65		
Adapter		40W 19V 2.1A x 2		
Input Voltage		AC 110 ~ 240V		
Warranty		1 years		
Environment				
MTBF		50000 hours		
Operating Temperature		0 ~ 40°C (32 ~ 104°F)		
Storage Temperature		-20 ~ 60°C (-4 ~ 140°F)		
Relative Humidity		90% RH max		

Supports:

